


»» **Flexible LED screen**

Module information



High performance modules

Standardized size design,
Using 1212, 1515 lamp beads
and high quality brand IC.



High cost performance module

PCB board adopts flexible soft plate,
the bottom shell is made of superior silicone material,
the module thickness is only 8.5mm, high flexibility.

Hot

Hot

Model	P1.86	P1.875	P2	P2	P2.5	P3.076
Size	160*320mm	160*320mm	128*256mm	160*320mm	160*320mm	160*320mm
Pitch	1.86mm	1.875mm	2mm	2mm	2.5mm	3.076mm

Module Application




Regular screen



Cylindrical screen



External arc screen



The inner arc screen


Module Application



Flexible module Install the box body / mounting frame



Screen effect

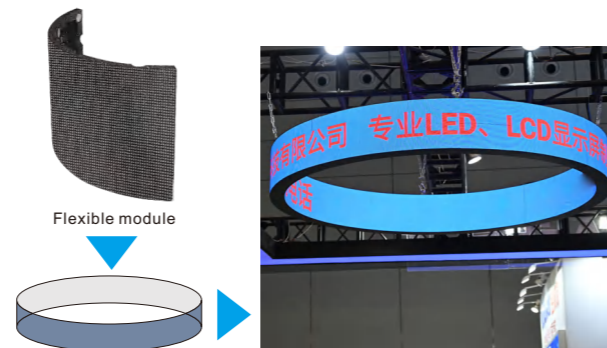

Flexible module Install the box body / mounting frame



Screen effect

Application



Parameter

Model	P1.875 / P3	P1.86 / P2 / P2.5 / P3.076	P2 / P4
Module Size	120*240mm(W*H)	160*320mm(W*H)	128*256mm(W*H)
Pitch	1.875mm / 3mm	1.86mm / 2mm / 2.5mm / 3.076mm	2mm / 4mm
Cabinet Size	Customized		
Power	300W/m ² - 800W/m ²		
Brightness	≥800CD/m ²		
Viewing Angle	H:160° V:160°		
Refresh Rate	3840Hz / 7680Hz		
Pixel Configuration	1R1G1B		
Protection Degree	IP31		
Operating Voltage	110V / 220V		
Working Temperature	-20°C - 50°C		
Lifetime	100000H		
Installation mode	Hoisting / Fixed installation / Arc installation		