


»» **Interactive Floor LED screen**



Module information

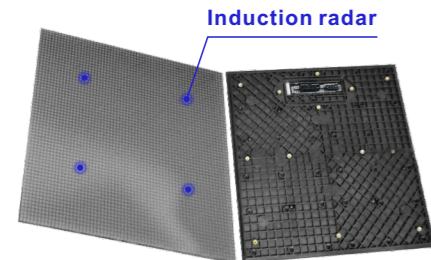

Module Size:250*250mm

Model	P2.604	P2.976	P3.91	P4.81
Size	250*250mm			
Pitch	2.9604mm	2.976mm	3.91mm	4.81mm
lamp bead	1515	1515	1921	1921

Product superiority

Screen interaction

The screen uses multiple pressure sensors, by collecting the pressure data on the screen surface, and accurate analysis, to give the corresponding screen interaction effect.



High weight bearing

The mask is a PC+composite that can be directly exposed to sunlight. Fully waterproof, strong earthquake resistance, good anti-skid property.



Application



Parameter

Model	P2.604	P2.976	P3.91	P4.81
Pitch	2.604mm	2.976mm	3.91mm	4.81mm
Density	147456 dots/m ²	112896 dots/m ²	65536 dots/m ²	43264 dots/m ²
LED Type	SMD1515		SMD1921	
Module Size	250*250mm(W*H)			
Module Resolution	96*96(W*H)	84*84(W*H)	64*64(W*H)	52*52(W*H)
Cabinet Size	500*500*75mm / 500*1000*75mm(W*H*D)			
Cabinet Resolution	92*192 192*384(W*H)	168*168 168*336(W*H)	128*128 128*256(W*H)	104*104 104*208(W*H)
Module	2*2=4pcs / 2*4=8pcs			
Power	300-800W/m ²			
Brightness	≥2000CD/m ²			
Best Viewing Distance	≥3m		≥4m	≥5m
Driving mode	1/32Scan	1/28Scan	1/16Scan	1/13Scan
Viewing Angle	H:160° V:160°			
Refresh Rate	3840Hz / 7680Hz			
Pixel Configuration	1R1G1B			
Protection Degree	IP65			
Operating Voltage	110V / 220V			
Working Temperature	-20°C - 50°C			
Lifetime	100000H			
Customized Solutions	Non-standard specifications can be customized			